

Industrial L2+ 4-Port 10/100/1000T 802.3bt PoE + 1-Port 10/100/1000T + 2-Port 1G/2.5G SFP Managed Ethernet Switch w/ 12V Booster



Renewable Energy for Powering the Switch

PLANET's newly-launched Industrial Managed Ethernet Switch, the IGS-5225-4UP1T2S-12V, can be powered by the inexhaustible and natural source of energy, such as solar, wind and hydroelectric power to conserve energy so as to economically power these remote IP cameras and wireless APs.

Complying with the IEEE 802.3bt Power over Ethernet Plus Plus technology, PLANET's improved IGS-5225-4UP1T2S-12V L2+ Industrial Managed PoE++ Switch features four 10/100/1000BASE-T 802.3bt PoE++ ports with each port powering up to **95 watts**, one extra 10/100/1000BASE-T copper port and **two 100/1000/2500BASE-X SFP interfaces** in a rugged IP30 aluminum case for stable operation in heavy industrial environments.

The IGS-5225-4UP1T2S-12V adopts **DC 9~ 48V** power boost technology to solve power source issue but does not require special power supplies. It supports rich PoE operation modes including 95-watt 802.3bt type-4 PoE++ ports, 95-watt legacy mode and force mode to solve the incompatibility of non-standard 4-pair PoE PDs in the field. With a total power budget of up to 360 watts with dual power input for different kinds of PoE applications, it is designed to efficiently handle power distribution for a versatile array of connected devices which meet the Environmental, Social, and Governance (ESG) principles. Leveraging cutting-edge IP-based technology, PLANET has transformed conventional Power Over Ethernet (PoE) into genuine network devices that align with sustainable and responsible business practices.

Being able to operate under wide temperature range from **-40 to 75 degrees C**, the IGS-5225-4UP1T2S-12V can be placed in almost any difficult environment. The IGS-5225-4UP1T2S-12V also allows either DIN-rail or wall mounting for efficient use of cabinet space.



Physical Port

- **4 10/100/1000BASE-T** Gigabit Ethernet RJ45 ports with **802.3bt PoE++** Injector function
- **1 10/100/1000BASE-T** Gigabit Ethernet RJ45 port
- **2 100/1000/2500BASE-X** SFP slots for SFP type auto detection
- One USB Type C serial port (115200,8, N, 1) for basic management and setup

Power over Ethernet

- Complies with IEEE 802.3bt Power over Ethernet Plus Plus Type-4 PSE
- Backward compatible with IEEE 802.3at PD device
- Up to 4 ports of IEEE 802.3at/IEEE 802.3bt PoE++ devices powered
- Supports PoE power up to 95 watts for each PoE port
- Total of 360-watt PoE budget
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Remote power feeding up to 100m in standard mode and 250m in extend mode
- PoE management features
 - PoE admin-mode control
 - PoE management mode selection
 - Per port PoE function enable/disable
 - PoE port power feeding priority
 - Per PoE port power limit
 - PoE Port Status monitoring
 - PD classification detection
 - Sequence port PoE
- Intelligent PoE features
 - PoE Legacy/Force mode enable/disable
 - Temperature threshold control
 - PoE usage threshold control
 - PoE schedule
 - PD alive check
 - LLDP PoE Neighbors

Industrial Protocol

- Modbus TCP for real-time monitoring in a SCADA system
- IEEE 1588v2 PTP (Precision Time Protocol) transparent clock mode


Industrial Case and Installation

- IP30 aluminum case
- DIN-rail and wall-mount designs

Wide Range of Power Input Suitable for Renewable Energy and Automotive Markets

The IGS-5225-4UP1T2S-12V industrial-grade managed switch is designed to deliver exceptional performance and versatility for a variety of industrial applications. With support for a wide DC power input range of **9-54V** and a **power boost of up to 54V**, this switch ensures stable and reliable operation even in demanding environments. It also supports **802.3bt PoE++** with a maximum total **power budget of 360W**, making it ideal for powering high-demand devices such as IP cameras, Wi-Fi access points, and other networked equipment. Thanks to its excellent energy conversion efficiency, it reduces power loss and maximizes operational performance.


This switch, using solar, is a robust, energy-efficient solution for transportation markets. Furthermore, it complies with **ESG (Environmental, Social, and Governance)** standards. Furthermore, it complies with **ESG (Environmental, Social, and Governance)** standards, highlighting its commitment to sustainable practices and reducing environmental impact. More importantly, it can enhance system's efficiency and reliability, as well as support a greener, more responsible future.

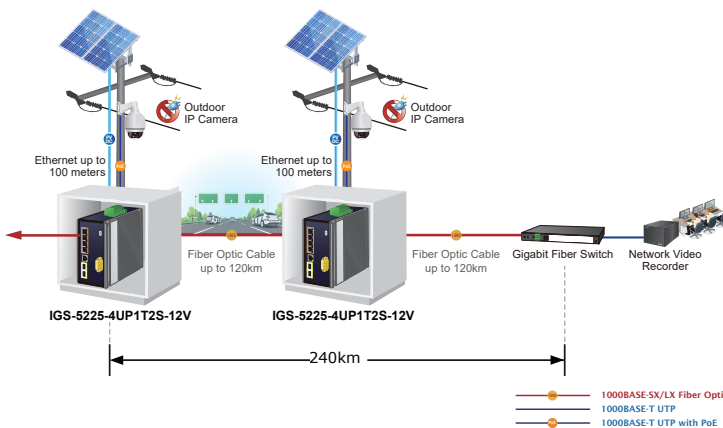

802.3bt PoE++ 95-watt Power over 4-pair UTP Solution

As the IGS-5225-4UP1T2S-12V adopts the IEEE 802.3bt PoE++ standard technology, it is capable to source up to 95 watts of power by using all the four pairs of standard Cat5e/6 Ethernet cabling to deliver power and full-speed data to each remote PoE compliant powered device (PD). Its power capability is three times more than that of the conventional 802.3at PoE+ and it is an ideal solution for those high power consuming network PDs, such as:

- PoE PTZ speed dome cameras
- Network devices
- Thin clients
- AIO (all-in-one) touch PCs, point of sale (POS) and information kiosks
- Remote digital signage displays
- PoE lightings

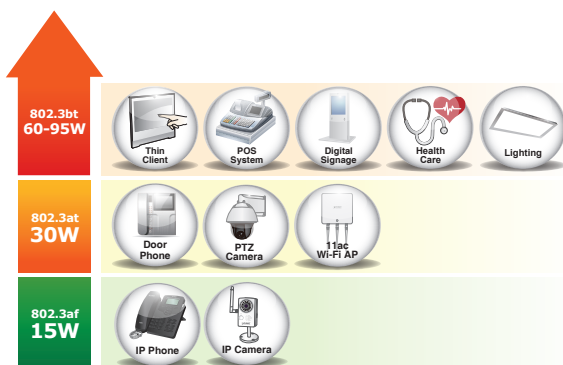

- DC 9-54V, redundant power with reverse polarity protection
- Supports 6000 VDC Ethernet ESD protection
- -40 to 75 degrees C operating temperature

Digital Input and Digital Output

- 2 Digital Input (DI)
- 2 Digital Output (DO)
- Integrate sensors into auto alarm system
- Transfer alarm to IP network via email and SNMP trap

Layer 2 Features

- Prevents packet loss with back pressure (half-duplex) and IEEE 802.3x pause frame flow control (full-duplex)
- High performance of Store-and-Forward architecture, and runt/CRC filtering eliminates erroneous packets to optimize the network bandwidth
- Storm Control support
- Broadcast/Multicast/Unicast
- Supports **VLAN**
 - IEEE 802.1Q tagged VLAN
 - Supports provider Bridging (VLAN Q-in-Q, IEEE 802.1ad)
 - Private VLAN Edge (PVE)
 - Port Isolation
 - MAC-based VLAN
 - Protocol-based VLAN
 - Voice VLAN
 - VLAN Translation
 - GVRP
- Supports **Spanning Tree Protocol**
 - IEEE 802.1D Spanning Tree Protocol (STP)
 - IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
 - IEEE 802.1s Multiple Spanning Tree Protocol (MSTP), spanning tree by VLAN
 - BPDU Guard
- Supports **Link Aggregation**
 - 802.3ad Link Aggregation Control Protocol (LACP)
 - Cisco ether-channel (static trunk)
 - Maximum 3 trunk groups with 7 ports per trunk group
 - Up to 14Gbps bandwidth (duplex mode)
- Provides port mirror (many-to-1)
- Port mirroring to monitor the incoming or outgoing traffic on a particular port
- Loop protection to avoid broadcast loops
- Supports ERPS (Ethernet Ring Protection Switching)
- Compatible with Cisco Uni-directional link detection(UDLD) that monitors a link between two switches and blocks the ports on both ends of the link if the link fails at any point between the two devices
- Link Layer Discovery Protocol (LLDP) and LLDP-MED

802.3bt PoE++ and Advanced PoE Power Output Mode Management


To meet the demand of various powered devices consuming stable PoE power, the IGS-5225-4UP1T2S-12V supports multi-PoE operation modes that include 95-watt 802.3bt type-4 PoE++ mode, 4-pair legacy and force modes to solve the incompatibility of non-standard 4-pair PoE PDs in the field.

- 95W 802.3bt PoE++ Power Output Mode
- 36W End-span 802.3at PoE+ Power Output Mode
- 36W Mid-span 802.3at PoE+ Power Output Mode

PoE Watts	PoE Operation Mode	Power Output Mode
95W	802.3bt PoE++	(Pins 1, 2, 3, 6 + Pins 4, 5, 7, 8)
36W	End-span 802.3at PoE	(Pins 1, 2, 3, 6)
36W	Mid-span 802.3at PoE	(Pins 4, 5, 7, 8)

Selectable End-span/Mid-span/UPoE 802.3bt PoE++ Power Inline Mode

Port	PoE Mode	Schedule	Power Inline Mode	PD Type	Extended mode	Priority	Power Allocation [W]
*	<All>	<All>	<All>	<All>	<All>	<All>	95
1	Enable	Profile 1	<All>	Standard	Disable	High	95
2	Enable	Profile 1	End-Span	Standard	Disable	High	95
3	Enable	Profile 1	Mid-Span	Standard	Disable	High	95
4	Enable	Profile 1	BT	Standard	Disable	High	95

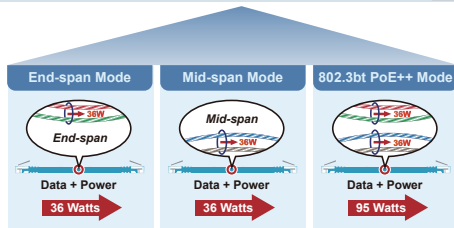

Cybersecurity Network Solution to Minimize Security Risks

The cybersecurity features that virtually need no effort and cost to have include the protection of the switch management and the enhanced security of the mission-critical network. Both SSHv2 and TLSv1.2 protocols are utilized to provide strong protection against advanced threats. The network administrator can now construct highly-secure corporate networks with considerably less time and effort than before.



Redundant Ring, Fast Recovery for Critical Network Applications

The IGS-5225-4UP1T2S-12V supports redundant ring technology and features strong, rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates advanced ITU-T G.8032 ERPS (Ethernet Ring Protection Switching) technology, Spanning Tree Protocol (802.1s MSTP), and redundant power input system into customer's industrial automation network to enhance system reliability and uptime in harsh factory environments.

- Provides ONVIF for co-operating with PLANET video IP surveillances

Layer 3 IP Routing Features

- Supports maximum 32 static routes and route summarization

Quality of Service

- Ingress Shaper and Egress Rate Limit per port bandwidth control
- 8 priority queues on all switch ports
- Traffic classification
 - IEEE 802.1p CoS
 - IP TOS/DSCP/IP precedence
 - IP TCP/UDP port number
 - Typical network application
- Strict priority and Weighted Round Robin (WRR) CoS policies
- Supports QoS and In/Out bandwidth control on each port
- Traffic-policing policies on the switch port
- DSCP remarking

Multicast

- Supports IPv4 IGMP snooping v1, v2 and v3
- Supports IPv6 MLD snooping v1 and v2
- Querier mode support
- IPv4 IGMP snooping port filtering
- IPv6 MLD snooping port filtering
- Multicast VLAN Registration (MVR) support

Security


- Authentication
 - IEEE 802.1x Port-based/MAC-based network access authentication
 - Built-in RADIUS client to co-operate with the RADIUS servers
 - TACACS+ login users access authentication
 - RADIUS/TACACS+ users access authentication
- Access Control List
 - IP-based Access Control List (ACL)
 - MAC-based Access Control List
- Source MAC/IP address binding
- DHCP Snooping to filter un-trusted DHCP messages
- Dynamic ARP Inspection discards ARP packets with invalid MAC address to IP address binding
- IP Source Guard prevents IP spoofing attacks
- IP address access management to prevent unauthorized intruder

Management

- IPv4 and IPv6 dual stack management


The IGS-5225-4UP1T2S-12V also protects customer's industrial network connectivity with switching recovery capability that is used for implementing fault tolerant ring and mesh network architectures. If the Industrial network is interrupted accidentally, the fault recovery time could be as fast as 10ms to quickly bring the network back to normal operation.

ERPS Ring for Video Transmission Redundancy

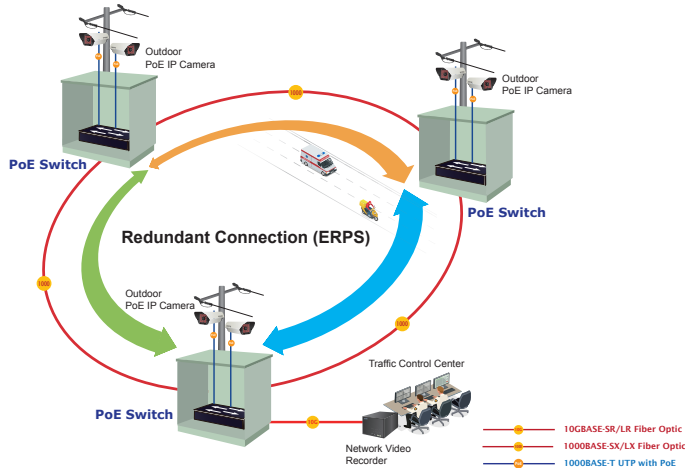

Convenient and Smart ONVIF Devices with Detection Feature

PLANET has developed an awesome feature -- ONVIF Support -- which is specifically designed for co-operating with video IP surveillances. From the IGS-5225-4UP1T2S-12V's GUI, you just need one click to search and show all of the ONVIF devices via network application. In addition, you can upload floor images to the switch and can remotely monitor or inspect an assembly line. Moreover, you can get real-time surveillance information and online/offline status; the PoE reboot can be controlled from the GUI.

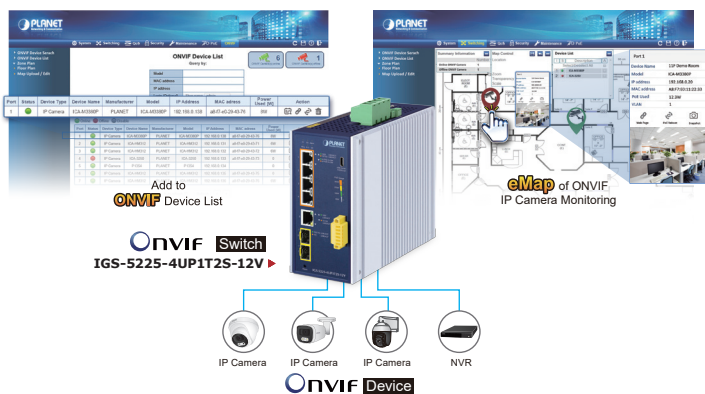

Built-in Unique PoE Functions for Powered Devices Management

As it is the managed PoE++ switch for surveillance, wireless and VoIP networks, the IGS-5225-4UP1T2S-12V features the following special PoE management functions:


- PD Alive Check
- Scheduled Power Recycling
- PoE Schedule
- PoE Usage Monitoring
- PoE Extension

- Switch Management Interfaces
 - Console/Telnet Command Line Interface
 - Web switch management
 - SNMP v1, v2c, and v3 switch management
 - SSHv2 and TLSv1.2 secure access
- IPv6 IP Address/NTP/DNS management
- BOOTP and DHCP for IP address assignment
- System Maintenance
 - Firmware upload/download via HTTP
 - Reset button for system reboot or reset to factory default
 - Dual Images
- DHCP Relay
- DHCP Option82
- DHCP Server Mode support
- User Privilege levels control
- NTP (Network Time Protocol)
- Link OAM
 - Network Diagnostic
 - ICMPv6/ICMPv4 Remote Ping
 - Cable Diagnostic technology provides the mechanism to detect and report potential cabling issues
- SMTP/Syslog remote alarm
- Four RMON groups (history, statistics, alarms and events)
- SNMP trap for interface Link up and Link down notification
- System Log
- SFP-DDM (Digital Diagnostic Monitor)
- PLANET Smart Discovery Utility for deployment management
- PLANET NMS/NMSViewerPro app for deployment management
- PLANET CloudViewerPro app for deployment management

Intelligent Powered Device Alive Check


The IGS-5225-4UP1T2S-12V PoE++ Switch can be configured to monitor connected PD's status in real time via ping action. Once the PD stops working and responding, the IGS-5225-4UP1T2S-12V will recycle the PoE port power and bring the PD back to work. It also greatly enhances the reliability in that the PoE port will reset the PD power, thus reducing administrator's management burden.

PD Alive Check

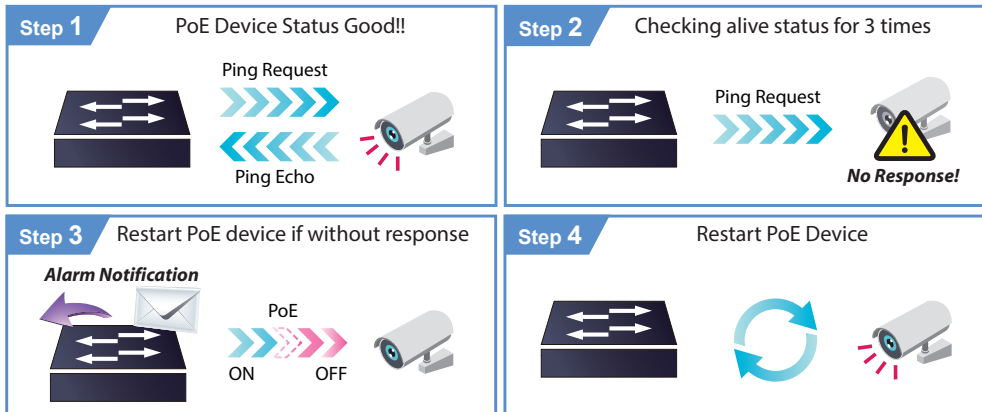


Scheduled Power Recycling

The IGS-5225-4UP1T2S-12V allows each of the connected PoE IP cameras or PoE wireless access points to reboot at a specified time each week. Therefore, it will reduce the chance of IP camera or AP crash resulting from buffer overflow.

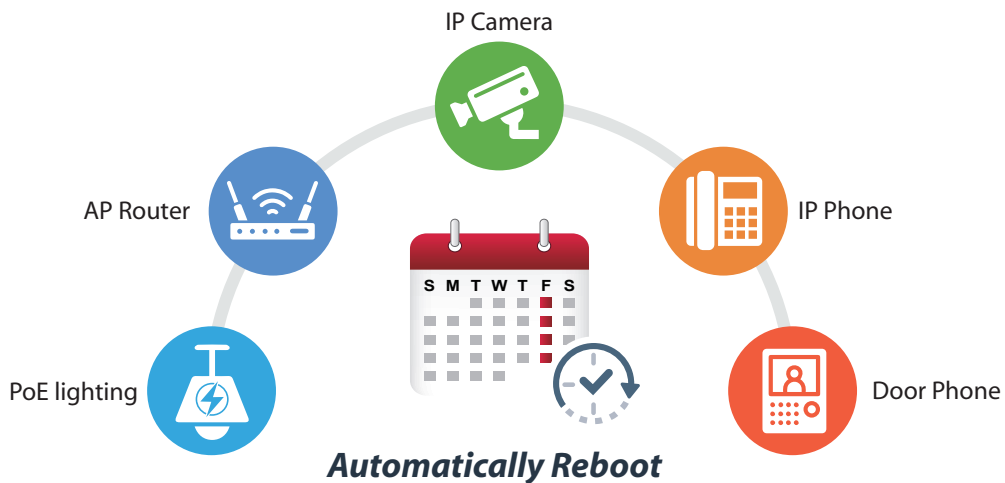


PoE Schedule for Energy Savings

Under the trend of energy savings worldwide and contributing to environmental protection on the Earth, the IGS-5225-4UP1T2S-12V can effectively control the power supply besides its capability of giving high watts power. The built-in "PoE schedule" function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs or enterprises save power and money.

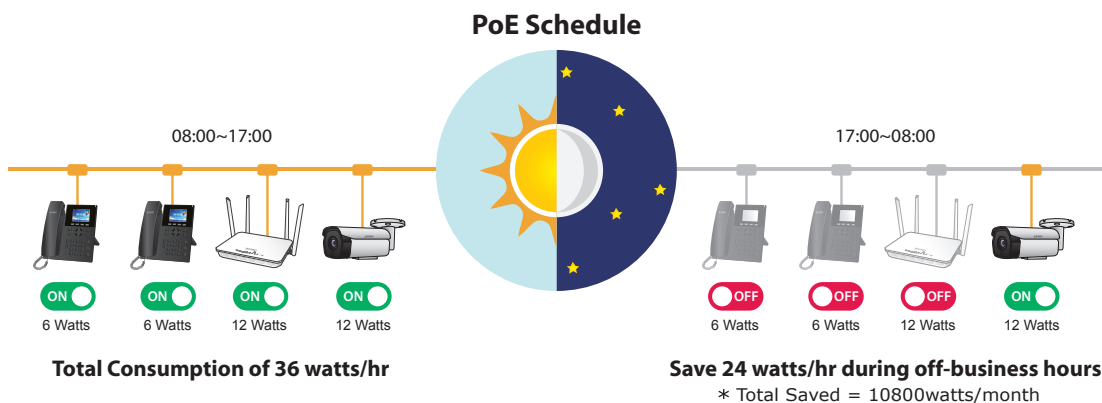


Intelligent LED Indicator for Real-time PoE Usage

The IGS-5225-4UP1T2S-12V helps users to monitor the current status of PoE power usage easily and efficiently by means of its advanced LED indication. Called “**PoE Power Usage**”, the front panel of the IGS-5225-4UP1T2S-12V has four amber LEDs indicating **90W**, **180W**, **270W** and **360W** of PoE power usage.

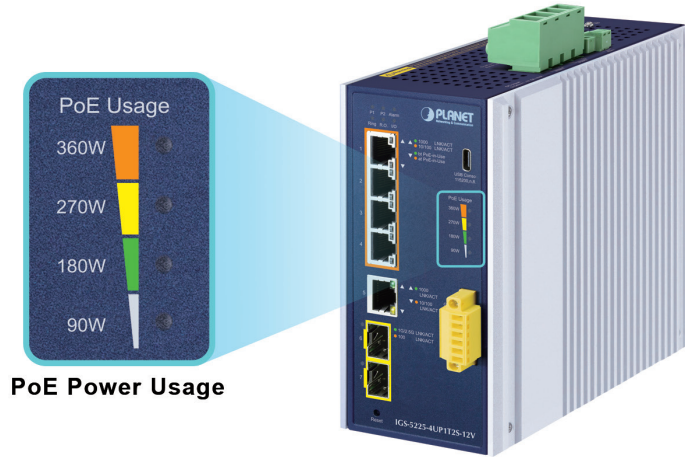


PoE Usage Monitoring

Via the power usage chart in the web management interface, the IGS-5225-4UP1T2S-12V enables the administrator to monitor the status of the power usage of the connected PDs in real time. Thus, it greatly enhances the management efficiency of the facilities.

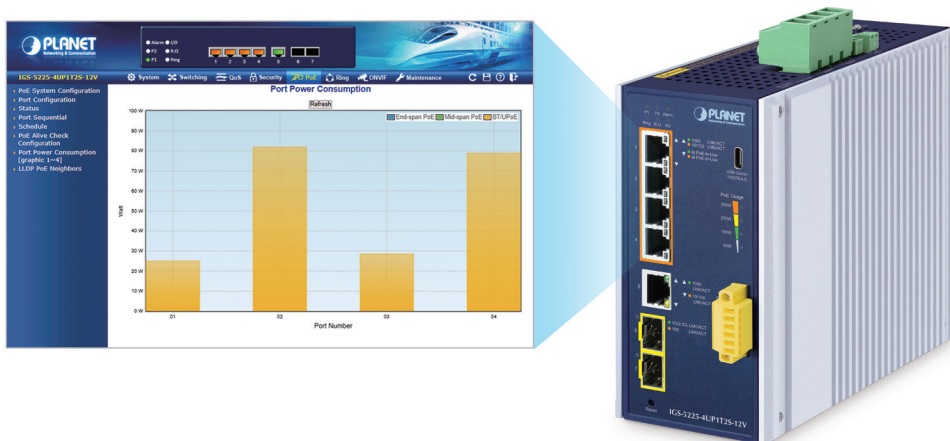


802.3at PoE+ Power and Ethernet Data Transmission Distance Extension

In the “**Extend**” operation mode, the IGS-5225-4UP1T2S-12V operates on a per-port basis at 10Mbps duplex operation but can support 50-watt PoE power output over a distance of up to 250 meters overcoming the 100m limit on Ethernet UTP cable. With this brand-new feature, the IGS-5225-4UP1T2S-12V provides an additional solution for 802.3at PoE distance extension, thus saving the cost of Ethernet cable installation.

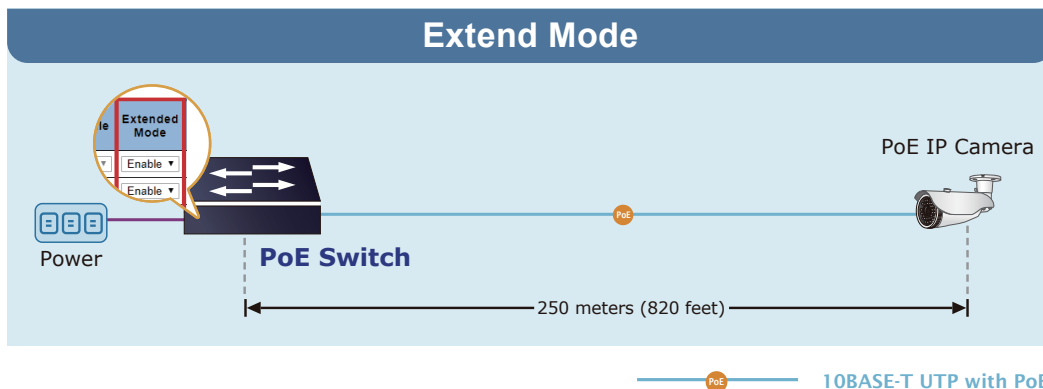

IPv6/IPv4 Dual Stack Management


Supporting both IPv6 and IPv4 protocols, the IGS-5225-4UP1T2S-12V helps the SMBs to step in the IPv6 era with the lowest investment as its network facilities need not be replaced or overhauled if the IPv6 FTTx edge network is set up.

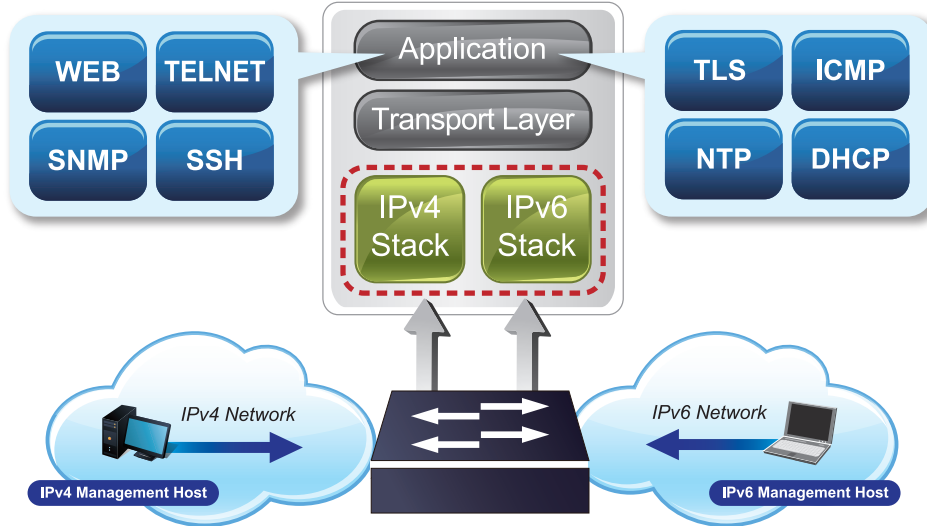

SMTP/SNMP Trap Event Alert

The IGS-5225-4UP1T2S-12V provides event alert function to help to diagnose the abnormal device owing to whether or not there is a break of the network connection, or the rebooting response.


SMTP/SNMP Trap Event Alert

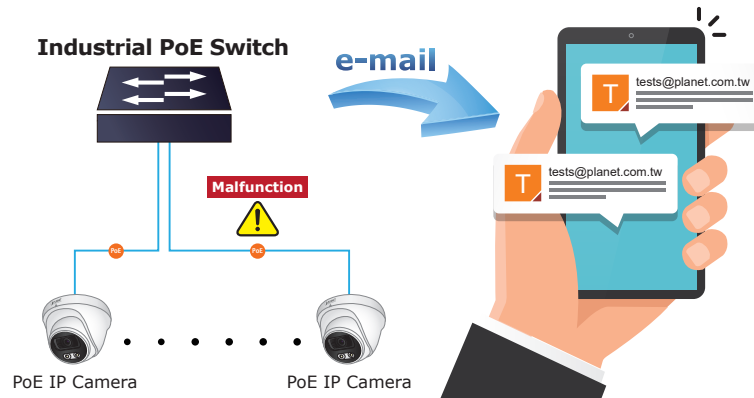

Effective Alarm Alert for Better Protection

The IGS-5225-4UP1T2S-12V supports a Fault Alarm feature which can alert the users when there is something wrong with the switches. With this ideal feature, the users would not have to waste time finding where the problem is. It will help to save time and human resource.


Fault Alarm Feature

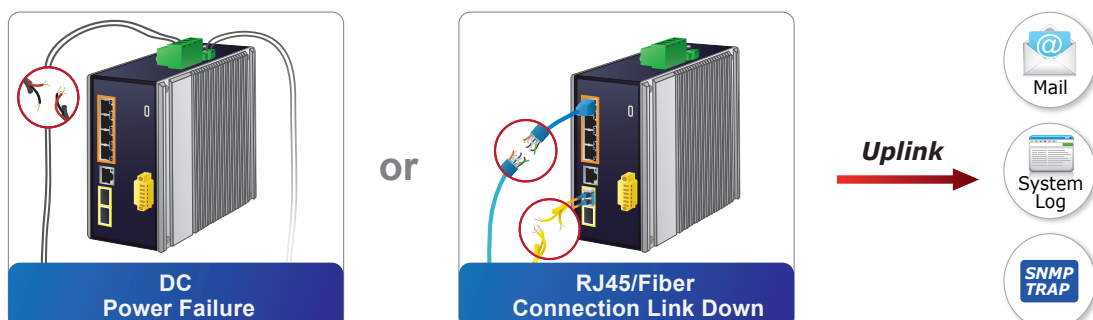


Digital Input and Digital Output for External Alarm

The IGS-5225-4UP1T2S-12V supports Digital Input and Digital Output on its upper panel. This external alarm enables users to use Digital Input to detect and log external device status (such as door intrusion detector), and send event alarm to the administrators. The Digital Output could be used to alarm the administrators if the IGS-5225-4UP1T2S-12V port shows link down, link up or power failure.

Digital Input

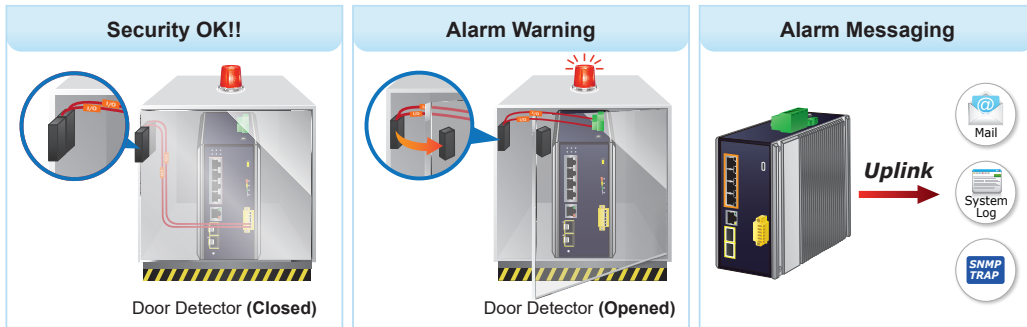

Digital Output

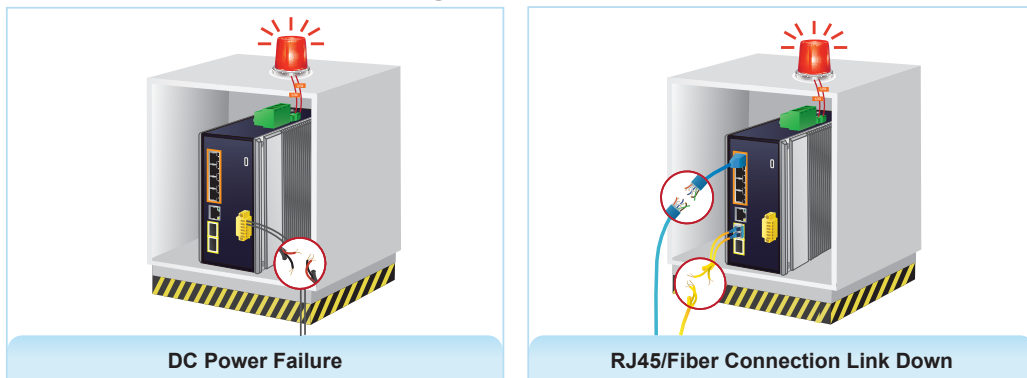


Layer 3 IPv4 and IPv6 Software VLAN Routing for Secure and Flexible Management

To help customers stay on top of their businesses, the IGS-5225-4UP1T2S-12V not only provides ultra high transmission performance and excellent Layer 2 technologies, but also IPv4/IPv6 software VLAN routing feature which allows to crossover different VLANs and different IP addresses for the purpose of having a highly-secure, flexible management and simpler networking application.

Robust Layer 2 Features


The IGS-5225-4UP1T2S-12V can be programmed for advanced switch management functions such as dynamic port link aggregation, Q-in-Q VLAN, private VLAN, Rapid Spanning Tree Protocol, Layer 2 to Layer 4 QoS, bandwidth control and IGMP snooping. The IGS-5225-4UP1T2S-12V provides 802.1Q tagged VLAN, and the VLAN groups allowed will be maximally up to 4K. Via aggregation of supporting ports, the IGS-5225-4UP1T2S-12V allows the operation of a high-speed trunk combining multiple ports. It enables a maximum of up to 3 trunk groups with 7 ports per trunk group, and supports fail-over as well.

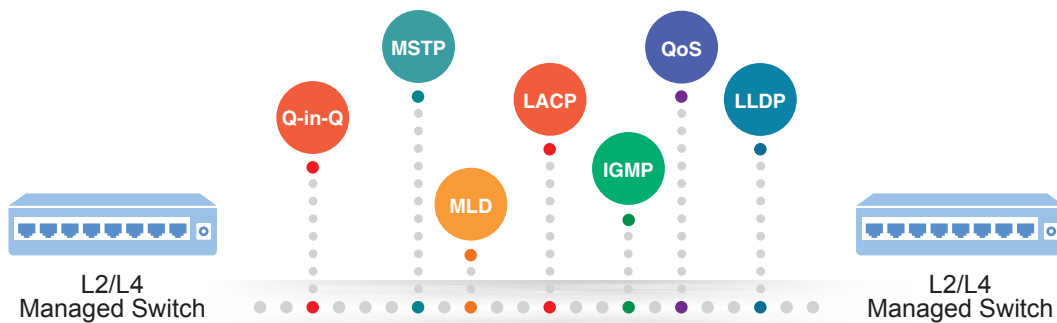

Efficient Secure Management

For efficient management, the IGS-5225-4UP1T2S-12V is equipped with Command line, Web and SNMP management interfaces.

- With the built-in **Web-based** management interface, the IGS-5225-4UP1T2S-12V offers an easy-to-use, platform-independent management and configuration facility.
- For **text-based** management, it can be accessed via Telnet and the RJ45 console port.
- By supporting the standard SNMP protocol, the switch can be managed via any SNMP-based management software.

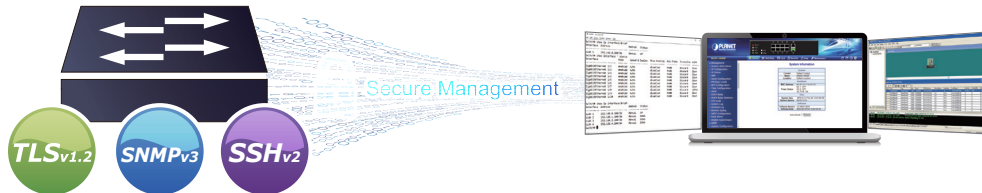

Powerful Security

The IGS-5225-4UP1T2S-12V offers comprehensive **Layer 2 to Layer 4 Access Control List (ACL)** for enforcing security to the edge. It can be used to restrict network access by denying packets based on source and destination IP address, TCP/UDP ports or defined typical network applications. Its protection mechanism also comprises **802.1x Port-based** and **MAC-based** user and device authentication. With the **private VLAN** function, communication between edge ports can be prevented to ensure user privacy. The network administrators can now construct highly-secure corporate networks with considerably less time and effort than before.

Remote Management Solution

PLANET's **Universal Network Management System (UNI-NMS)** and CloudViewer app support IT staff by remotely managing all network devices and monitoring PDs' operational statuses. Thus, they're designed for both the enterprises and industries where deployments of PDs can be as remote as possible, without having to go to the actual location once a bug or faulty condition is found. With the UNI-NMS or CloudViewer app, all kinds of businesses can now be speedily and efficiently managed from one platform.




Flexibility and Extension Solution

The additional two mini-GBIC slots built in the IGS-5225-4UP1T2S-12V support triple-speed 100/1000/2500BASE-X SFP (small form-factor pluggable) fiber-optic modules, meaning the administrator now can flexibly choose the suitable SFP transceiver according to not only the transmission distance but also the transmission speed required. The distance can be extended from 300meters to 2km (multi-mode fiber) and to 10/20/30/40/60/70/80/120 kilometers (single-mode fiber or WDM fiber). They are well suited for applications within the enterprise data centers and distributions.

Intelligent SFP Diagnosis Mechanism

The IGS-5225-4UP1T2S-12V supports SFP-**DDM** (Digital Diagnostic Monitor) function that greatly helps network administrator to easily monitor real-time parameters of the SFP, such as optical output power, optical input power, temperature, laser bias current, and transceiver supply voltage.

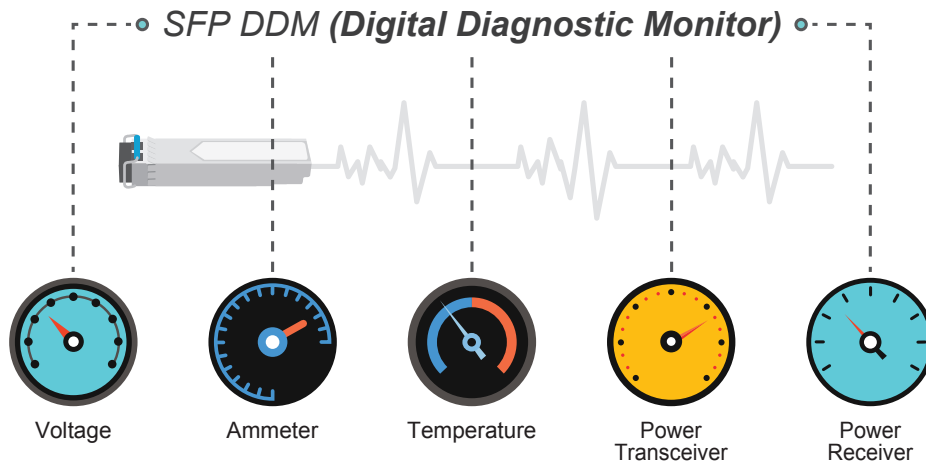


Modbus TCP Provides Flexible Network Connectivity for Factory Automation

With the supported **Modbus TCP/IP** protocol, the IGS-5225-4UP1T2S-12V can easily integrate with **SCADA** systems, **HMI** systems and other data acquisition systems in factory floors. It enables administrators to remotely monitor the industrial Ethernet switch's **operating information, port information** and **communication status**, thus easily achieving enhanced monitoring and maintenance of the entire factory.

1588 Time Protocol for Industrial Computing Networks

The IGS-5225-4UP1T2S-12V is ideal for telecom and Carrier Ethernet applications, supporting MEF service delivery and timing over packet solutions for IEEE 1588 and synchronous Ethernet.

Time Synchronization in Network


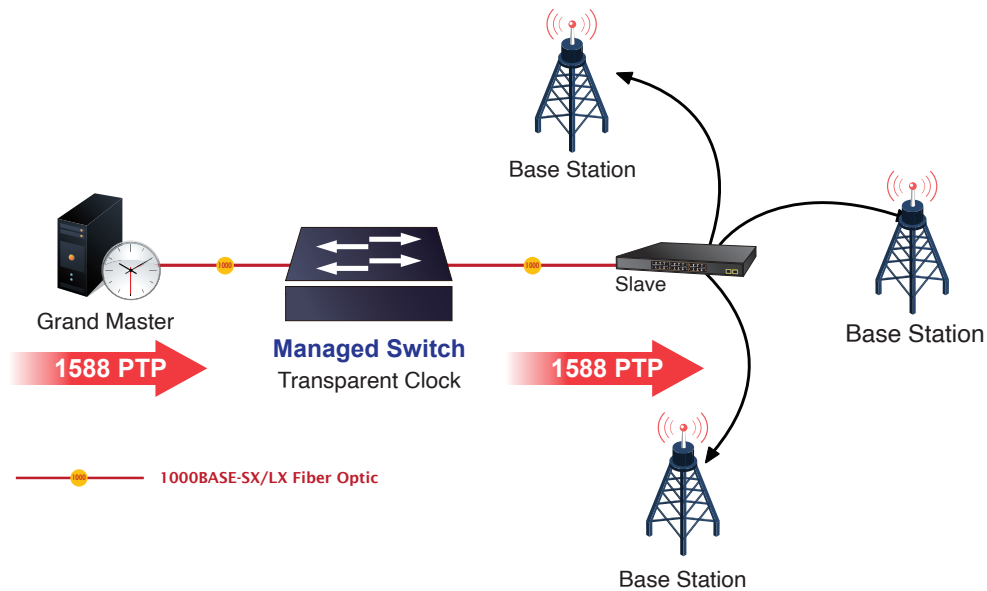


Applications

Gigabit 802.3bt PoE++ and PoE+ IP Surveillance and Wireless LAN Service in Public Transportation

With IEEE 802.3bt/802.3at Power over Ethernet standard, the IGS-5225-4UP1T2S-12V can directly connect with any third-party IEEE 802.3at/802.3bt compliant devices like PTZ (Pan, Tilt & Zoom) IP cameras, PTZ speed dome cameras, color touch-screen Voice over IP (VoIP) telephones, and multi-channel wireless LAN access points. Wireless LAN would be more efficient for the transportation station to provide high speed and wide area Internet services for travelers. With the PoE wireless LAN structure, the transportation authority gains benefits from less cost while providing better Internet services in wider areas for the travelers.



Vehicle PoE Solution

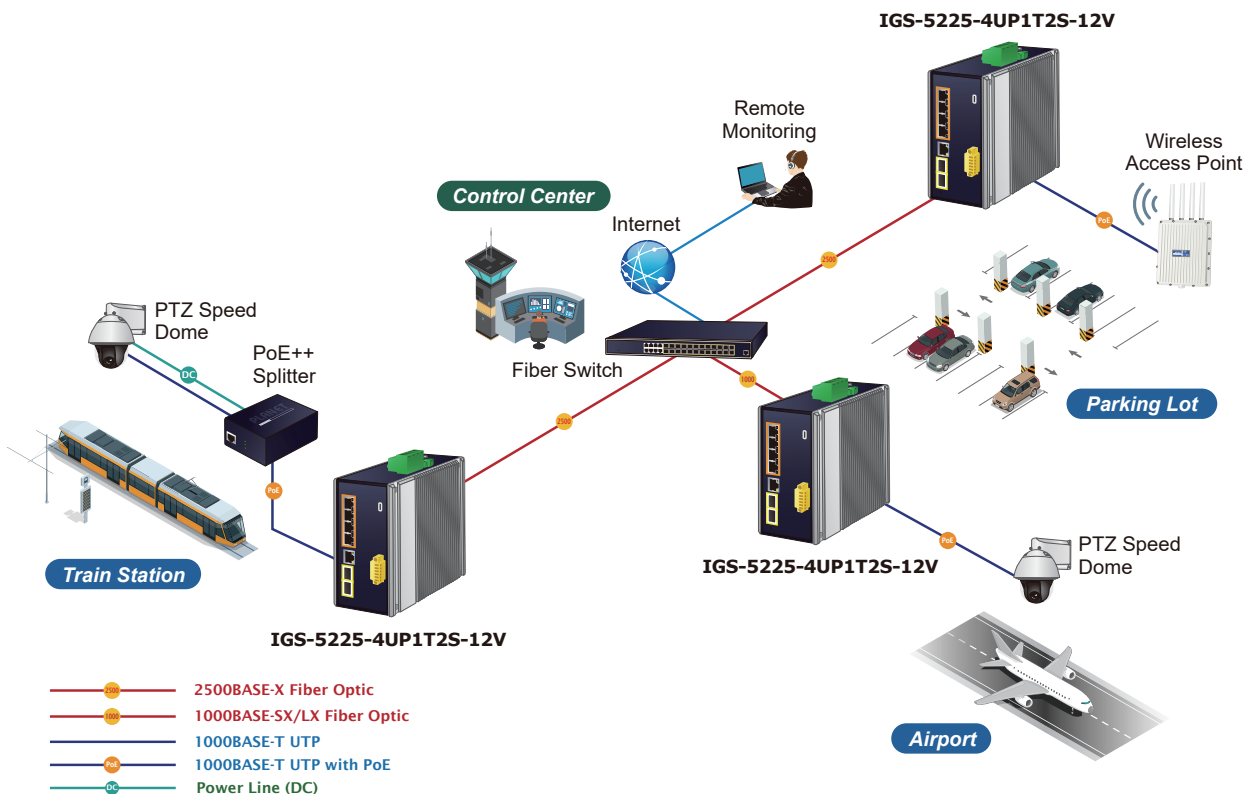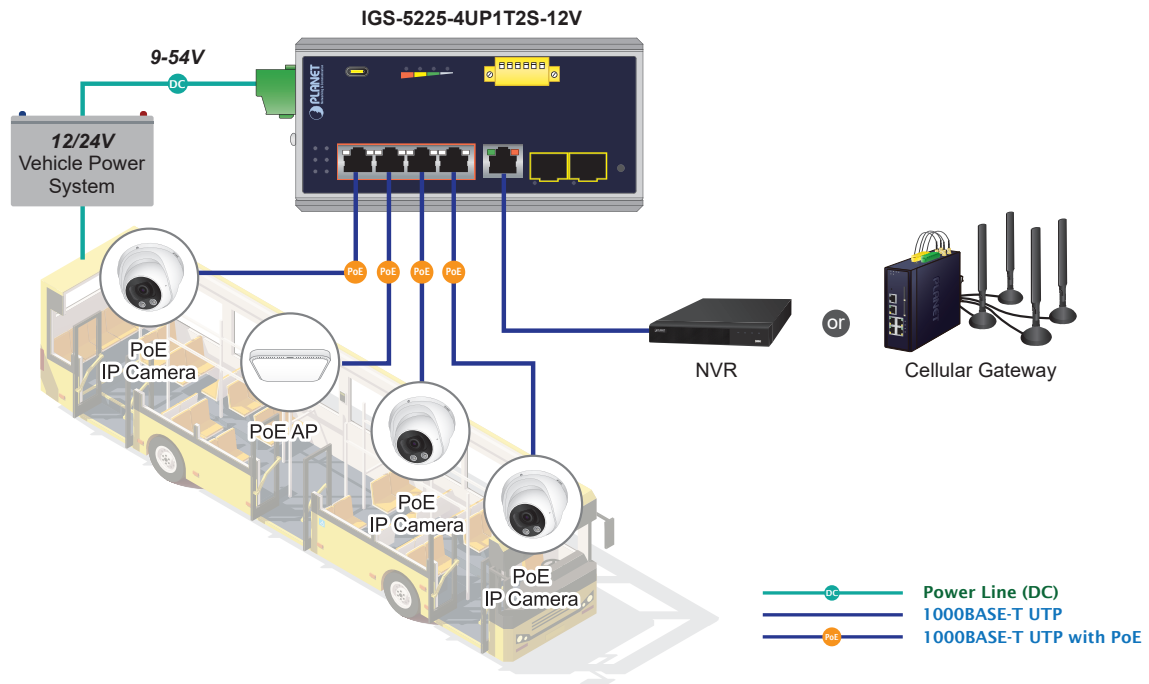

Solar-based 12V/24V Power Feed for Industrial Equipment Deployment

The IGS-5225-4UP1T2S-12V uses 9~54V DC power input, suitable for 12V/24V renewable energy applications, easily solving power problems, like electrical power supply.

With the 802.3bt PoE++ injector and 2.5GBASE-X SFP fiber ports, the IGS-5225-4UP1T2S-12V supplies power to other devices, such as IP phone, IP camera, or wireless AP where high-speed and stable data transmission can be made to a remote core network. It can extend the distance to a maximum of 120 kilometers between the IGS-5225-4UP1T2S-12V and control center via fiber-optic link.

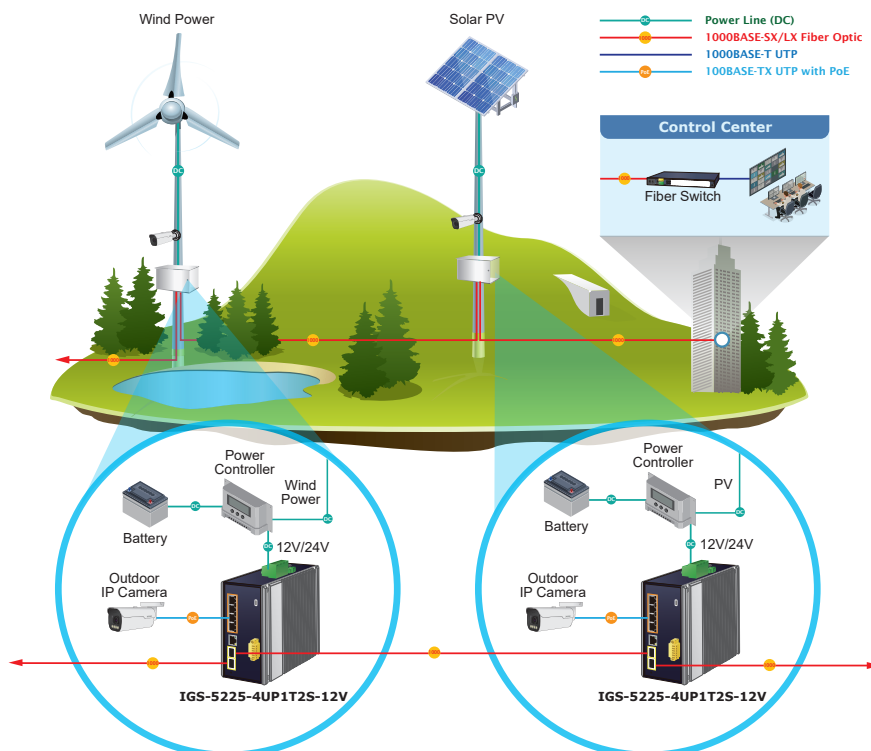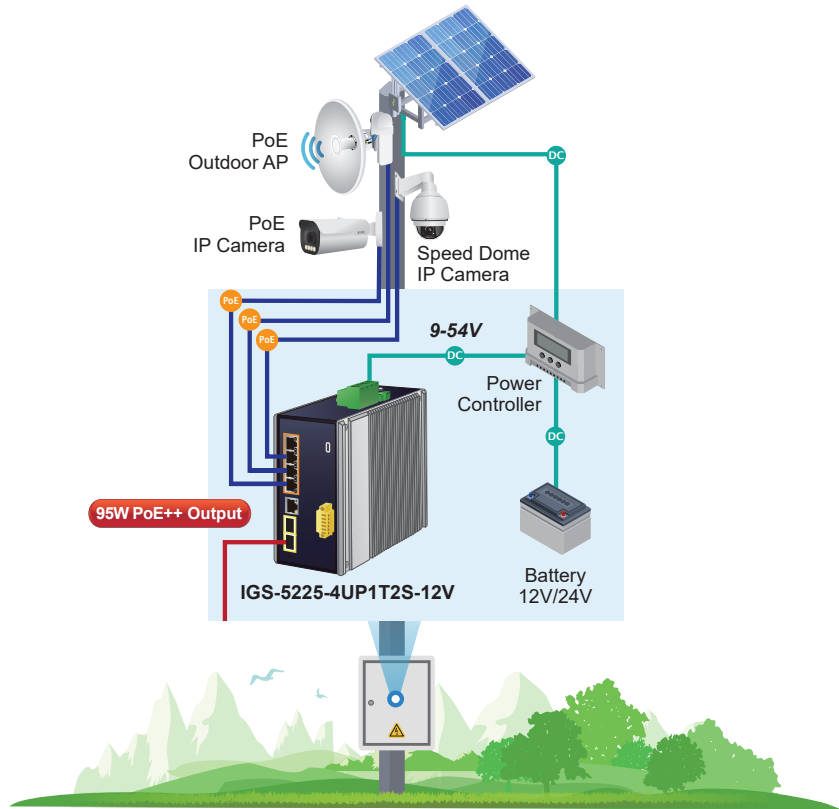

Specifications


Product	IGS-5225-4UP1T2S-12V
Hardware Specifications	
Copper Ports	5 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports
SFP/mini-GBIC Slots	2 100/1000/2500BASE-X mini-GBIC SFP ports (Port 6 and Port 7)
Console	1 x USB Type C serial port (115200, 8, N, 1)
Reset Button	< 5 sec: System reboot > 5 sec: Factory default
Enclosure	IP30 aluminum case
Installation	DIN-rail kit and wall-mount kit
Connector	Removable 4-pin terminal block for power input Pin 1/2 for Power 1, Pin 3/4 for Power 2 Removable 2-pin terminal block for fault alarm interface Removable 6-pin terminal block for DI/DO interface Pin 1/2 for DI 1 & 2, Pin 3/4 for DO 1 & 2, Pin 5/6 for GND
Alarm	One relay output for power failure. Alarm Relay current carry ability: 1A @ DC 24V
DI/DO	2 Digital Input (DI): Level 0: -24V~2.1V (±0.1V) Level 1: 2.1V~24V (±0.1V) Input Load to 24V DC, 10mA max. 2 Digital Output (DO): Open collector to 24V DC, 100mA max.
Dimensions (W x D x H)	76 x 135x 152 mm
Weight	1400g
Power Requirements	Dual 9~54V DC
Power Consumption	Max. 7.6 watts/25.9BTU@54V DC input (System on) Max. 367.6 watts/1253.5BTU@54V DC input (Full loading with 802.3bt PoE++)
ESD Protection	6KV DC
EFT Protection	6KV DC
LED Indicator	System: Power 1 (Green) Power 2 (Green) Alarm (Red) Ring (Green) R.O. (Ring Owner) (Green) DIDO (Red) 10/100/1000T RJ45 Ports: 1000Mbps LNK/ACT (Green) 10/100Mbps LNK/ACT (Amber) 10/100/1000T RJ45 PoE++ Ports: 802.3bt PoE++-in-use x 1 (Green) 802.3at PoE-in-use x 1 (Amber) 100/1G/2.5GBASE-X SFP Interface: 1G/2.5G LNK/ACT (Green) 100 LNK/ACT (Amber) PoE Usage: 90W, 180W, 270W, 360W (Amber)
Switching Specifications	
Switch Architecture	Store-and-Forward
Switch Fabric	20Gbps/non-blocking
Throughput (packet per second)	14.8Mpps@ 64Bytes packet
Address Table	8K entries, automatic source address learning and aging
Shared Data Buffer	4Mbits
Flow Control	IEEE 802.3x pause frame for full duplex Back pressure for half duplex
Jumbo Frame	9Kbytes
Power Over Ethernet	
PoE Standard	IEEE 802.3bt PoE++ PSE Backward compatible with IEEE 802.3at PoE PSE
PoE Power Supply Type	802.3BT End-span Mid-span

PoE Power Output	Per port 54V DC <ul style="list-style-type: none"> ■ 802.3bt mode, Ports 1 to 4: maximum 95 watts ■ End-span mode: maximum 36 watts ■ Mid-span mode: maximum 36 watts
Power Pin Assignment	802.3bt: 1/2(-), 3/6(+), 4/5(+), 7/8(-) End-span: 1/2(-), 3/6(+) Mid-span: 4/5(+), 7/8(-)
PoE Power Budget	Single power <=24V DC input: 90W maximum (depending on power input) Single power 24V~48V DC input: 180W maximum (depending on power input) Single power >=48V DC input: 240W maximum (depending on power input) Dual power <=24V DC input: 120W maximum (depending on power input) Dual power 24V~48V DC input: 240W maximum (depending on power input) Dual power >=48V DC input: 360W maximum (depending on power input) * Dual power input must be the same as DC voltage, like dual 54V.
Number of 95W 802.3bt Type-4 PDs	3
Number of 60W 802.3bt Type-3 PDs	4
Number of 802.3at PDs	4
PoE Management Functions	
PoE System Management	PoE Port status monitoring Total PoE power budget control PoE usage threshold and temperature threshold
Enhanced PoE Mode	Standard/Legacy/Force
PoE Device Live Detection	Per port remote PD IP address 4 actions <ul style="list-style-type: none"> - None - PD reboot - PR reboot and alarm - Alarm
PoE Power Recycling	Daily or predefined schedule
PoE Schedule	4 schedule profiles
PoE Extend Mode	Remote power feeding up to 100m in standard mode and 250m in extend mode
Layer 3 Function	
IP Interfaces	Max. 8 VLAN interfaces
Routing Table	Max. 32 routing entries
Routing Protocols	IPv4 software static routing IPv6 software static routing
Layer 2 Function	
Port Configuration	Port disable/enable Auto-negotiation 10/100/1000Mbps full and half duplex mode selection Flow control disable/enable Port link capability control
Port Status	Display each port's speed duplex mode, link status, flow control status, auto negotiation status, trunk status
Port Mirroring	TX/RX/both Many-to-1 monitor RMirror – Remote Switched Port Analyzer (Cisco RSPAN) Supports up to 5 sessions
VLAN	IEEE 802.1Q tag-based VLAN IEEE 802.1ad Q-in-Q tunneling Private VLAN Edge (PVE) MAC-based VLAN Protocol-based VLAN Voice VLAN MVR (Multicast VLAN Registration) GVRP (GARP VLAN Registration Protocol) Up to 4K VLAN groups, out of 4096 VLAN IDs
Spanning Tree Protocol	IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol BPDU Guard
Link Aggregation	IEEE 802.3ad LACP/static trunk Supports 3 trunk groups with 7 ports per trunk group

IGMP Snooping	IPv4 IGMP (v1/v2/V3) snooping IPv4 IGMP querier mode support Up to 255 multicast groups
MLD Snooping	IPv6 MLD (v1/v2) snooping IPv6 MLD querier mode support Up to 255 multicast groups
Ring	Supports ERPS, and complies with ITU-T G.8032 Recovery time < 10ms @ 3 nodes Recovery time <50ms @ 16 nodes Supports major ring and sub-ring.
Synchronization	IEEE 1588v2 PTP (Precision Time Protocol) - Peer-to-peer transparent clock - End-to-end transparent clock
QoS	Traffic classification based, strict priority and WRR 8-level priority for switching - Port number - 802.1p priority - 802.1Q VLAN tag - DSCP/TOS field in IP packet
Bandwidth Control	Per port bandwidth control - Ingress: 100Kb~3276Mbps - Egress: 100Kb~3281Mbps
Storm Control	Unicast/Multicast/Broadcast
Security Functions	
Access Control List	IP-based ACL/MAC-based ACL ACL based on: - MAC Address - IP Address - Ethertype - Protocol Type - VLAN ID - DSCP - 802.1p Priority Up to 512 entries
Security	Port security IP source guard, up to 512 entries Dynamic ARP inspection, up to 1K entries Command line authority control based on user level Static MAC address, up to 64 entries
AAA	RADIUS client TACACS+ client
Network Access Control	IEEE 802.1x port-based network access control MAC-based authentication Local/RADIUS authentication
Management	
Basic Management Interfaces	Console; Telnet; Web browser; SNMP v1, v2c
Secure Management Interfaces	SSHv2, TLSv1.2, SNMP v3
System Management	Firmware upgrade by HTTP protocol through Ethernet network Configuration upload/download through HTTP Remote syslog System log LLDP protocol NTP PLANET Smart Discovery Utility PLANET NMS PLANET NMSViewerPro App PLANET CloudViewerPro App
Event Management	Remote syslog System log SMTP

ONVIF	ONVIF device discovery ONVIF device monitoring Floor Map
SNMP MIBs	RFC-1213 MIB-II IF-MIB RFC-1493 Bridge MIB RFC-1643 Ethernet MIB RFC-2863 Interface MIB RFC-2665 Ether-Like MIB RFC-2819 RMON MIB (Group 1, 2, 3 and 9) RFC-2737 Entity MIB RFC-2618 RADIUS Client MIB RFC-2933 IGMP-STD-MIB RFC 3411 SNMP-Frameworks-MIB IEEE 802.1X PAE LLDP MAU-MIB Power over Ethernet MIB
Standards Conformance	
Regulatory Compliance	FCC Part 15 Class A, CE
Stability Testing	IEC60068-2-32 (free fall) IEC60068-2-27 (shock) IEC60068-2-6 (vibration)
Standards Compliance	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/100BASE-FX IEEE 802.3ab Gigabit 1000T IEEE 802.3z Gigabit SX/LX IEEE 802.3bz 2.5GBASE-X IEEE 802.3x flow control and back pressure IEEE 802.3ad port trunk with LACP IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol IEEE 802.1p Class of Service IEEE 802.1Q VLAN tagging IEEE 802.1ad Q-in-Q VLAN stacking IEEE 802.1x Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3at Power over Ethernet Plus IEEE 802.3bt Power over Ethernet Plus Plus IEEE 802.3ah OAM IEEE 802.1ag Connectivity Fault Management(CFM) IEEE 1588 PTPv2 RFC 768 UDP RFC 783 TFTP RFC 791 IP RFC 792 ICMP RFC 793 TCP RFC 2068 HTTP RFC 1112 IGMP v1 RFC 2236 IGMP v2 ITU-T G.8032 ERPS Ring ITU-T Y.1731 Performance Monitoring
Environment	
Operating Temperature	-40 ~ 75 degrees C
Storage Temperature	-40 ~ 85 degrees C
Humidity	5 ~ 95% (non-condensing)

Dimensions

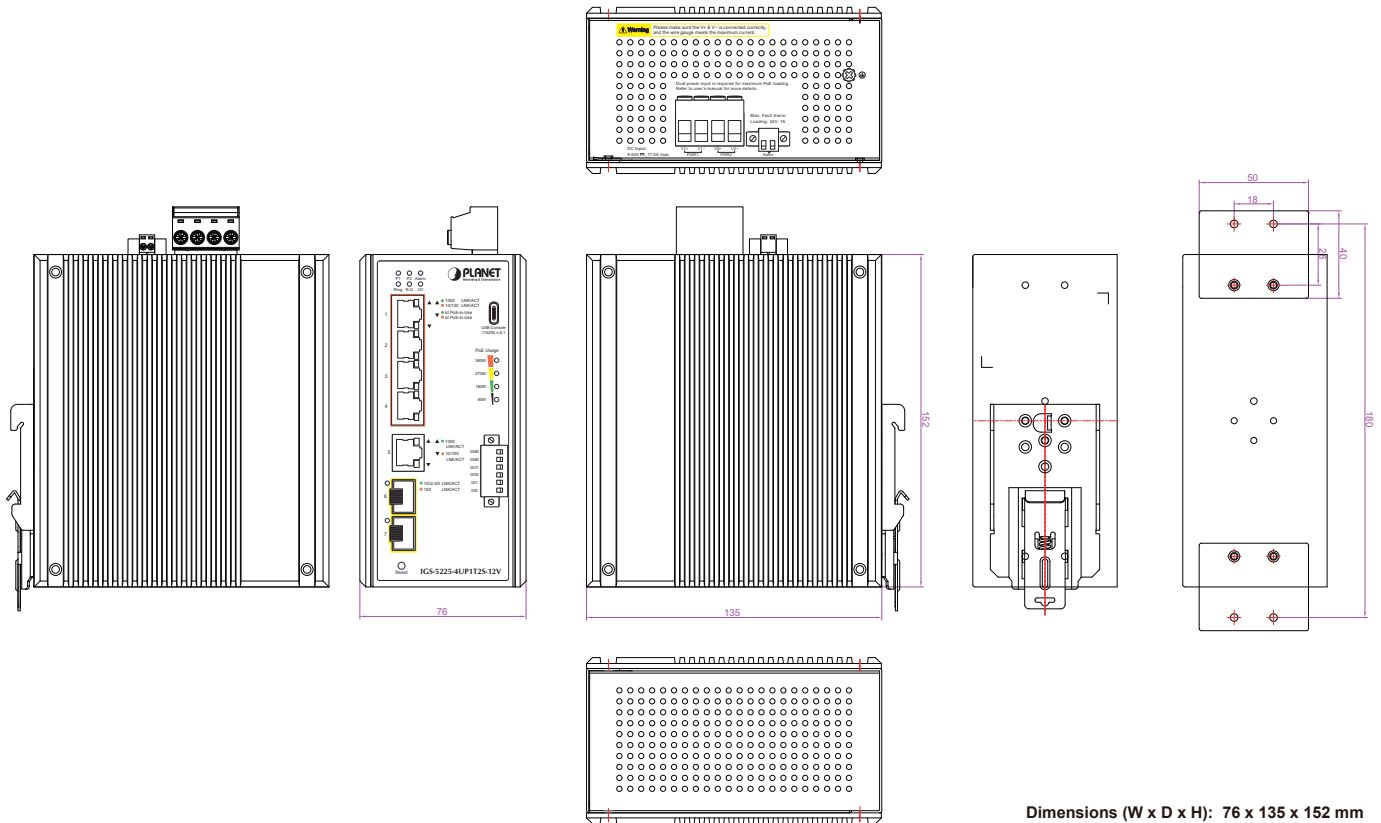

Ordering Information

IGS-5225-4UP1T2S-12V

Industrial L2+ 4-Port 10/100/1000T 802.3bt PoE + 1-Port 10/100/1000T + 2-Port 1G/2.5G SFP Managed Ethernet Switch w/12V Booster

Available 100Mbps Modules

Fast Ethernet Transceiver (100BASE-X SFP)

Model	Speed (Mbps)	Connector Interface	Fiber Mode	Distance	Wavelength (nm)	Operating Temp.
MFB-TFX	100	LC	Multi-Mode	2km	1310nm	-40 ~ 85°C
MFB-TF20	100	LC	Single Mode	20km	1310nm	-40 ~ 85°C

Fast Ethernet Transceiver (100BASE-BX, Single Fiber Bi-directional SFP)

Model	Speed (Mbps)	Connector Interface	Fiber Mode	Distance	Wavelength (TX)	Wavelength (RX)	Operating Temp.
MFB-TFA20	100	WDM (LC)	Single Mode	20km	1310nm	1550nm	-40 ~ 85°C
MFB-TFB20	100	WDM (LC)	Single Mode	20km	1550nm	1310nm	-40 ~ 85°C
MFB-TFA40	100	WDM (LC)	Single Mode	40km	1310nm	1550nm	-40 ~ 85°C
MFB-TFB40	100	WDM (LC)	Single Mode	40km	1550nm	1310nm	-40 ~ 85°C
MFB-TSA	100	WDM (LC)	Multi- Mode	2km	1310nm	1550nm	-40 ~ 85°C
MFB-TSB	100	WDM (LC)	Multi- Mode	2km	1550nm	1310nm	-40 ~ 85°C

Available 1000Mbps Modules

Gigabit Ethernet Transceiver (1000BASE-X SFP)

Model	Speed (Mbps)	Connector Inter-face	Fiber Mode	Distance	Wavelength (nm)	Operating Temp.
MGB-TGT	1000	Copper	--	100m	--	-40 ~ 85°C
MGB-TSX	1000	LC	Multi Mode	550m	850nm	-40 ~ 85°C
MGB-TSX2	1000	LC	Multi Mode	2km	1310nm	-40 ~ 85°C
MGB-TLX(V2)	1000	LC	Single Mode	20km	1310nm	-40 ~ 85°C
MGB-TL30	1000	LC	Single Mode	30km	1310nm	-40 ~ 85°C
MGB-TL40	1000	LC	Single Mode	40km	1310nm	-40 ~ 85°C
MGB-TL70	1000	LC	Single Mode	70km	1550nm	-40 ~ 85°C
MGB-TL80	1000	LC	Single Mode	80km	1550nm	-40 ~ 85°C

Gigabit Ethernet Transceiver (1000BASE-BX, Single Fiber Bi-directional SFP)

Model	Speed (Mbps)	Connector In-terface	Fiber Mode	Distance	Wavelength (TX)	Wavelength (RX)	Operating Temp.
MGB-TSA	1000	WDM(LC)	Single Mode	2km	1310nm	1550nm	-40 ~ 85°C
MGB-TSB	1000	WDM(LC)	Single Mode	2km	1550nm	1490nm	-40 ~ 85°C
MGB-TLA10(V2)	1000	WDM(LC)	Single Mode	10km	1310nm	1550nm	-40 ~ 85°C
MGB-TLB10(V2)	1000	WDM(LC)	Single Mode	10km	1550nm	1310nm	-40 ~ 85°C
MGB-TLA20	1000	WDM(LC)	Single Mode	20km	1310nm	1550nm	-40 ~ 85°C
MGB-TLB20	1000	WDM(LC)	Single Mode	20km	1550nm	1310nm	-40 ~ 85°C
MGB-TLA40	1000	WDM(LC)	Single Mode	40km	1310nm	1550nm	-40 ~ 85°C
MGB-TLB40	1000	WDM(LC)	Single Mode	40km	1550nm	1310nm	-40 ~ 85°C
MGB-TLA60	1000	WDM(LC)	Single Mode	60km	1310nm	1550nm	-40 ~ 85°C
MGB-TLB60	1000	WDM(LC)	Single Mode	60km	1550nm	1310nm	-40 ~ 85°C
MGB-TLA80	1000	WDM(LC)	Single Mode	80km	1490nm	1550nm	-40 ~ 85°C
MGB-TLB80	1000	WDM(LC)	Single Mode	80km	1550nm	1490nm	-40 ~ 85°C
MGB-TLA120	1000	WDM(LC)	Single Mode	120km	1490nm	1550nm	-40 ~ 85°C
MGB-TLB120	1000	WDM(LC)	Single Mode	120km	1550nm	1490nm	-40 ~ 85°C

Available 2500Mbps Modules

Gigabit Ethernet Transceiver (2500BASE-X SFP)

Model	Speed (Mbps)	Connector Inter-face	Fiber Mode	Distance	Wavelength (nm)	Operating Temp.
MGB-2GTSR	2500	LC	Multi Mode	300m	850nm	-40 ~ 85°C
MGB-2GTLR2	2500	LC	Single Mode	2km	1310nm	-40 ~ 85°C
MGB-2GTLR20	2500	LC	Single Mode	20km	1310nm	-40 ~ 85°C

2.5 Gigabit Ethernet Transceiver (2500BASE-BX, Single Fiber Bi-directional SFP)

Model	Speed (Mbps)	Connector Inter-face	Fiber Mode	Distance	Wavelength (TX)	Wavelength (RX)	Operating Temp.
MGB-2GTLA20	2500	WDM(LC)	Single Mode	20km	1310nm	1550nm	-40 ~ 85°C
MGB-2GTLB20	2500	WDM(LC)	Single Mode	20km	1550nm	1310nm	-40 ~ 85°C

Related DIN-rail Power Supplies

PWR-240-48	48V, 240W DIN-rail Power Supply (NDR-480-48, adjustable 48-56V DC Output)
PWR-480-48	48V, 480W DIN-rail Power Supply (NDR-480-48, adjustable 48-56V DC Output)

Related Outdoor Access Point/Bridge Products

WDAP-850AC	Dual Band 802.11ac 1200Mbps Wave 2 Outdoor Wireless AP
WDAP-3000AX	Dual Band 802.11ax 3000Mbps Outdoor Wireless AP
WBS-900AC-KIT	5GHz 802.11ac 900Mbps TDMA Outdoor Long Range Wireless CPE Kit
WBS-512AC	5GHz 802.11ac 900Mbps Outdoor Wireless CPE

Related IP Surveillance PoE Products

ICA-3880	H.265+ 8MP Full Color Smart IR Bullet IP Camera
ICA-4880	H.265+ 8MP Full Color Smart IR Dome IP Camera
ICA-M3580P	H.265 5 Mega-pixel Smart IR Bullet IP Camera with Remote Focus and Zoom
ICA-M4580P	H.265 5 Mega-pixel Smart IR Dome IP Camera with Remote Focus and Zoom
ICA-HM620	2 Mega-pixel PoE Plus Speed Dome Internet Camera

PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City
231, Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: sales@planet.com.tw

Fax: 886-2-2219-9528

www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2025 PLANET Technology Corp. All rights reserved.

IGS-5225-4UP1T2S-12V