


Product Features

- Low light performance
- Sony STARVIS-2 technology
- Electronic Image Stabilization
- Digital Noise Reduction
- Day & Night Mode



Dimensions and Connectors

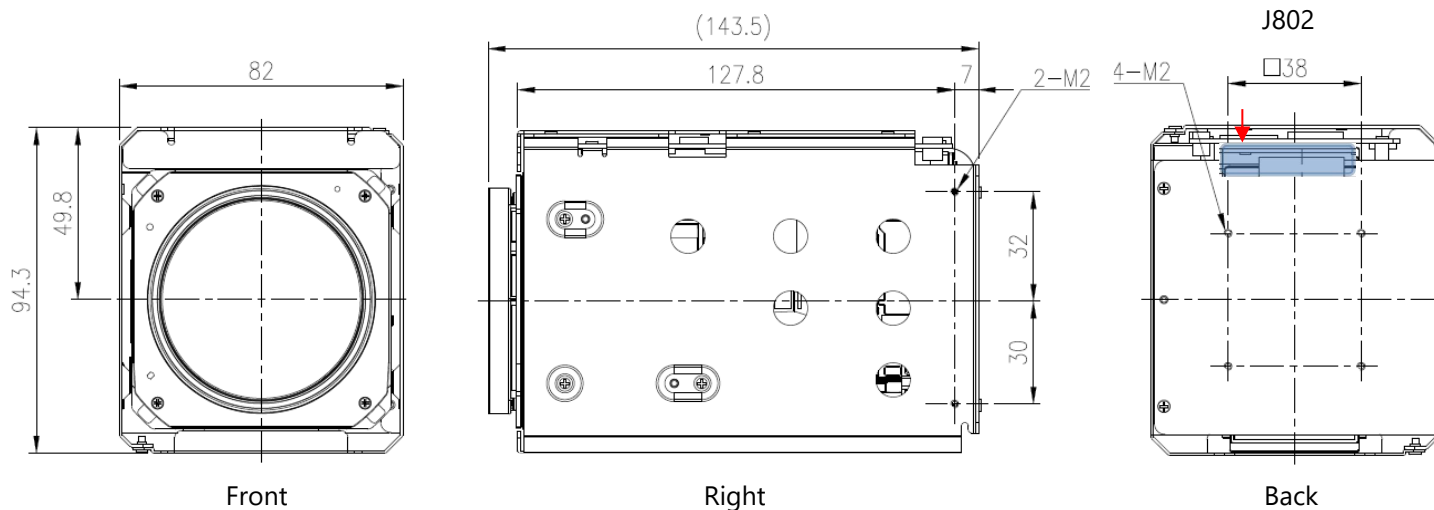

J802 (YEONHO 05002HR-40J05)

01 DC IN	11 GND	21 SD_DAT1	31 GND
02 DC IN	12 LED_EXT	22 UART0_TXD	32 AD_KEY
03 DC IN	13 CDS_IN	23 UART0_RXD	33 RESET
04 GND	14 ALARM_OUT	24 RS485_DIR	34 LINK#
05 GND	15 ALARM_IN	25 SD_DET	35 ACT#
06 CVBS	16 SD_DAT2	26 UART7_TXD	36 GND
07 GND	17 SD_DAT3	27 UART7_RXD	37 RX-
08 LINE_OUT	18 SD_CMD	28 GND	38 RX+
09 GND	19 SD_CLK	29 NC	39 TX-
10 LING_IN	20 SD_DAT0	30 NC	40 TX+

www.videologyinc.com

HEADQUARTERS LOCATION

Videology Industrial-Grade Cameras
35 Hampden Road
Mansfield | MA 02048 United States

EUROPE LOCATION

Videology Industrial-Grade Cameras
High Tech Campus 5
5656 AE Eindhoven | The Netherlands



Technical Specifications

Imaging

Image Sensor	1/1.8" SONY STARVIS-2 Sensor IMX347	
Sensor Resolution	2712 (H) x 1536 (V) = 4.17 MP	
Scan Mode	Progressive Scan	
Sync. System	Internal	
Video Resolution	Digital	1440p 30/25 fps, 1080p 30/25 fps, 720p 30/25 fps
	Analog	> 700 TVL (NTSC/PAL)
Min. Illumination	1/30 s	Color: 70 dB : 0.01 lux, B&W: 70 dB : 0.001 lux
	DSS 1/1 s	Color: 70 dB : 0.001 lux, B&W: 70 dB : 0.0001 lux
Video Output	Digital : Ethernet 10/100 Mbps Analog : CVBS	
Signal to Noise Ratio	> 50 dB (AGC off)	
Communication	Visca/Pelco-D/Pelco-P	
Electronic Image Stabilization	On/Off	

Parameter Controls

Focus	Auto/One push/Manual/Auto-ext	
Distance Presets	0.1/1.0/3.0/5.0/10.0 m	
Zoom	Optical	40x
	Digital	Off/up to 32x
	Speed	0 (Slow) ~ 7 (Fast)
Exposure	Auto/Iris Priority/Shutter Priority/Manual	
Gain Control (AGC)	0 ~ 10 steps	
Shutter Speed	1/30 ~ 1/40,000 sec	
Iris	F20 ~ F1.5	
Digital Slow Shutter	Off/2x/4x/8x/18x/32x	
Brightness	0 ~ 14 steps	
WDR	LOW/MIDDLE/HIGH	
Optical filter	D&N Day/D&N Night/D&N Auto/D&N Ext-in/Optical defog	
White Balance	Auto/One push/Manual/Indoor/Outdoor/Auto-ext	
HLC	0 ~ 20 steps	
DNR	2D/3D, 2D+3D	
Mirror/Flip	Off/On	
Edge Enhancement	0 ~ 15 steps	
Adaptive Contrast Enhancer	Off/Low/Middle/High	
Defog	Off/On (Auto/Manual)	
Privacy Mask	Off/8 Positions	
Motion Detection	Off/4 Positions	
OSD	Date & Time, Custom text	

Electrical

Power Supply	9 VDC to 15 VDC
Current Consumption	Max 560 mA (12 VDC)

Mechanical

Dimensions WxHxD	82 mm x 94.3 mm x 143.5 mm (3.23 " x 3.71 " x 5.65 ")
Weight	890 g (31.39 oz)

Environmental

Operating Temperature	-10 °C ~ +50 °C (14 °F ~ 122 °F)
Storage Temperature	-20 °C ~ +60 °C (-4 °F ~ 140 °F)

Lens

Lens Type	40x Day/Night Zoom Lens
Zoom Ratio	Optical 40x, Digital 32x
Focal Length	f = 6.5 mm ~ 260 mm
Aperture Ratio	F1.5 (Wide) ~ F5.3 (Tele)
Angle of View (DxHxV)	Wide 68.15° 61.14° 36.76°
	Tele 1.88° 1.64° 0.92°

Network

Ethernet	RJ-45 (10/100BASE-T)
Video Compression	H.265, H.264
Bit Rate	640Kbps ~ 16Mbps CBR, VBR, CVBR Support
Streaming Capability	Up to 4 streams
ONVIF	Profile S, T
Audio	Line In/Line Out, Bi-directional audio
Security	SHA-256, MD5 digest/IPtables (IP filtering)/TLS

Accessories

Control Board (P/N: IP-JIG)	IP JIG interface board with FFC cable and spacers
-----------------------------	---

www.videologyinc.com

HEADQUARTERS LOCATION

Videology Industrial-Grade Cameras
 35 Hampden Road
 Mansfield | MA 02048 United States

EUROPE LOCATION

Videology Industrial-Grade Cameras
 High Tech Campus 5
 5656 AE Eindhoven | The Netherlands

